

C3 – Cilindro Maxi

From the evolution of the E3-Maxi merged with the design of the Cylindrical Line, Alluser created C3-Cilindro Maxi. It is a model with the main characteristics of the E3 and, at the same time, those of a Cylindrical one.

C3-Cilindro Maxi:

- is perfect if you are looking for a **roomy**, large Secure Portal
- allows the transit to **4 or 5 people** at the time or a **wheelchair** for people with disabilities.
- is a refined and modern product which gives prestige to the entrance
- **Transparency** of the structure, 80% of which it is constructed from glass, is amplified by the dimensions of the portal.



VERSIONS AVAILABLE


K (= Kit Version)	YES
R (=Flush Mount to the floor Version)	YES
KR (Kit+Flush Mount to the floor Version)	YES

OPTIONS AVAILABLE FOR THIS PRODUCT

OUTER FINISHING	
RAL Embossed Effect	●
RAL Gloss Effect	●
RAL Micaceous Effect	●
Polished Stainless Steel	●
Brushed Stainless Steel	●
Polished Brass	●
Brushed Brass	●
Wood	
Marble	
Fake Metal Detector Columns	●
Branded Floor Mat	●
Finishing Floor Base	●
NIGHT MODE CLOSURE	
Armoured Shutter	
Mechanical Night Locking	●
INSTALLATION	
Floor Pan	●
Access Entry Ramp	●

EMERGENCY EXIT OPTIONS	
Internal Emergency Lever	●
External Emergency Lever	●
Emergency Crank	●
No Panic Shackle	
No Panic Shackle with Mag Lock	
GLASSES	
Standard [P1A]	●
Vandal Resistant [P3A]	●
Bullet Resistant [P6B/BR3]	●
Bullet Resistant [BR4 NS]	●
Opaque Glass	●
Tinted Glass	●
Bi-Parting	●
A.P.D.	
A.P.D.	●
2 Zones Floor Mat	●
1 Zone Floor Mat	

METAL DETECTOR	
MDX	●
MDX 3 columns	
Ceia 02pn8	
Ceia 02pn8 Large	●
CONTROL PANEL	
Main Control Panel	●
Additional Control Panel	●
Control Panel with Display	●
Emergency Exit Control Panel	●
4" TFT monitor for Control Panel	●
Colour or B/W CCTV camera	●
Access Control Connection Box	●
PUSH BUTTON & SIGNALS	
Internal Lights	●
Traffic Lights + Intercom	●
1st & Last Transit + Mechanical Keys	●
1st & Last Transit +7 Proximity Keys	●
Call Button for People with Disabilities	●

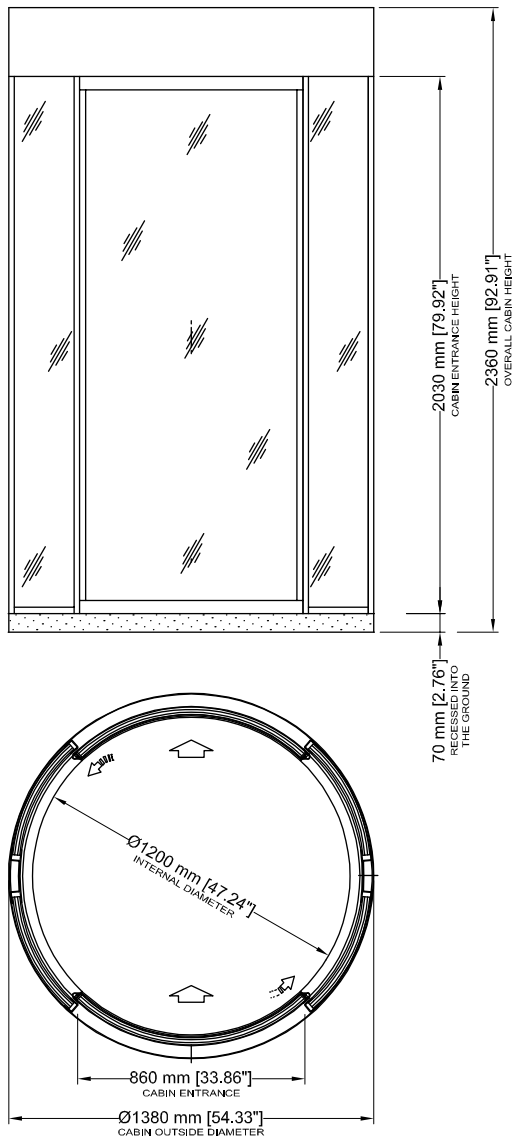

Power Supply: Input 100 / 240 Vac, 50 / 60 Hz; Output 24 Vdc, 7 A/hr. Apart from the Portal Structure (standard L.46/90).

Electrical consumption: 350 watt 2 A.

Emergency Battery Back up: 2 – 4 hr.

Motors: reversible motors with permanent magnet, working power of 24 Vdc, provided with a potentiometer for the continuous control of the door position.

Working Power: 24 Vdc.

Max Power Absorbed: 1,2 A/hr.

Accident Prevention: mobile doors provided with an electronic control of motor torque, for door safety stop in presence of obstacle (person).

Throughput: 900 people/hr (when no Access Control System such as A.P.D., Metal Detector and so on is integrated).

Metallic Structure: steel 30/10.

Ceiling: ceiling panel provided with a halogen lamp spotlight.

Floor: internal portal floor in anti-fire class black rubber .

Emergency unlocking device: placed on the secure side, externally of the Portal, it allows the manual opening of the automatic door.

Glass type	Standard	Approx Portal Weight (Standard Version) with the glass type as indicated (Kg)
Standard 11 mm	P1A-UNI EN 356	
Anti-Vandal 14 mm	P3A-UNI EN 356	
Bullet Resistant 27 mm	P6B-UNI EN 356; BR3-UNI EN 1063	

Standard Features: metallic structure steel 30/10 with standard RAL colour outer finishing; Control logic provided with Power Supply and Emergency Battery Back Up; internal halogen lamp spotlight; infrared sensor of presence of a person; un-secure side traffic light; secure side traffic light; control panel; intercom; 15 m control panel cable.



“nSoft” Ltd
 Address: Žalgirio str. 88A, Vilnius LT-09303
 Email: info@nsoft.lt
 Tel.: +370 659 010 02